




## Ecoline Mini

8 766 365 109

1,5 × 1,8 W, 1536 lm, 4000 K neutral white, DALI, wall washer 20° / 88°

L<sub>1</sub> = 1550 mm, L<sub>2</sub> = 1513 mm

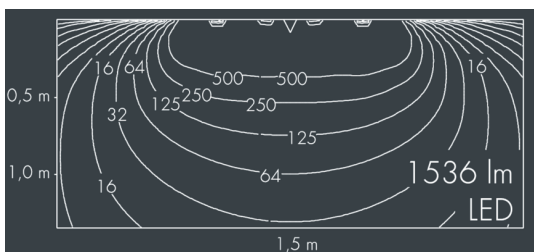

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, polycarbonate cover, with partial frosting for uniform light diffraction, silicon gasket, mounting flanges: 2 elongated holes Ø 6.5, spacing L<sub>2</sub>, tilt range: 220°, cable gland:

M16, with 1 m cable gland ÖLFLEX Robust 210 5G1,

connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral, dimmable driver (DALI), CRI > 80, max 2 SDCM,

service life L<sub>90</sub>/B<sub>10</sub> > 50.000 h,

Beam angle (FWHM): 20° / 88°, luminous flux: 1536 lm,

wattage: 26 W, delivered lumens 59 lm/W, protection type

IP65, protection class I, impact resistance IK10, windage area

0,059 m<sup>2</sup>, dimensions (L×H×W): 1550 × 43 × 40 mm, weight 3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK10

## Specification

Wattage	26 W	Beam angle (FWHM)	20° / 88°
Delivered lumens	59 lm/W	Housing colour	white RAL 9002
Light source	LED 4000 K	Power supply cable	Ø 5 – 9 mm
Color Rendering Index	CRI > 80	Protection type	IP65
Colour tolerance	max 2 SDCM	Protection class	I
Lifetime ta 25° C	L <sub>90</sub> /B <sub>10</sub> > 50.000 h	Impact resistance	IK10
Control gear	DALI	Windage area	0,059m <sup>2</sup>
Input voltage AC	220 – 240 V	Dimensions	1550 × 43 × 40 mm
Input voltage DC	195 – 240 V	Weight	3,00 kg
Voltage protection	2 kV L/N   4 kV L/PE	Max. ambient temperature ta	50°
Luminaires per B16A / C16A	50 / 85		