


Abstand/Distance	1 m	2 m	3 m	4 m	5 m	6 m
Beam Diameter	1,5 m	3,1 m	4,6 m	6,2 m	7,7 m	9,2 m
Illuminance (lx)	266 lx	66 lx	30 lx	17 lx	11 lx	7 lx

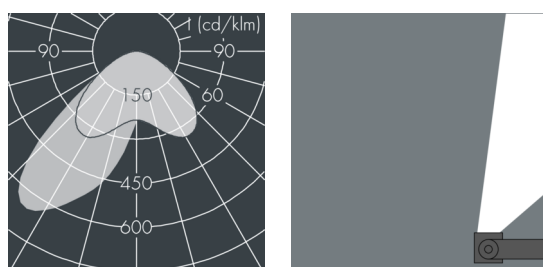

IP65 IK10

Wattage	15 W	Housing colour	silver grey
Delivered lumens	70 lm/W	Power supply cable	Ø 6 – 10 mm
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	max 2 SDCM	Impact resistance	IK10
Lifetime ta 25° C	L90/B10 > 50.000 h	Windage area	0,04m²
Control gear	1-10V	Dimensions	642 × 58 × 54 mm
Input voltage AC	110 – 240 V	Weight	2,30 kg
Input voltage DC	195	Max. ambient temperature ta	40°
Voltage protection	2 kV L/N 4 kV L/PE		
Luminaires per B16A / C16A	50 / 85		