



## Fluxa BG

8 275 150 009

For metal halide lamps (HIT-DE)

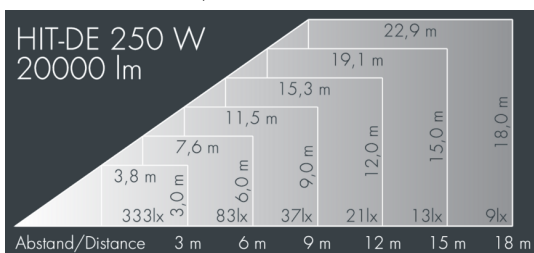

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 2 stainless steel screws, adjustable bracket assembly: 2 drilled holes  $\varnothing$  8.5 mm, spacing 64 mm, 2 drilled holes  $\varnothing$  8.5 mm, spacing 56 mm, tilt range:  $15^\circ$ , cable gland: M20, connecting terminal: 3 pole, high gloss asymmetrical aluminum reflector, integral ballast and ignitor, LPF, HPF available on request, luminous flux: 20000 lm, wattage: 250 W, delivered lumens 72 lm/W, protection type IP54, protection class I, impact resistance IK08, windage area 0,19 m<sup>2</sup>, dimensions (L×H×W): 600 × 185 × 335 mm, weight 14.3 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP54 IK08

## Specification

|                  |          |                    |                         |
|------------------|----------|--------------------|-------------------------|
| Wattage          | 250 W    | Housing colour     | silver grey             |
| Delivered lumens | 72 lm/W  | Power supply cable | $\varnothing$ 8 – 15 mm |
| Control gear     | on / off | Protection type    | IP54                    |
|                  |          | Protection class   | I                       |
|                  |          | Impact resistance  | IK08                    |
|                  |          | Windage area       | 0,19m <sup>2</sup>      |
|                  |          | Dimensions         | 600 × 185 × 335 mm      |
|                  |          | Weight             | 14,30 kg                |