





## Metaspaces

8 215 356 199

6 × 8,6 W, 6529 lm, 3000 K warm white, DALI,  
Street Optic 36° / 155°

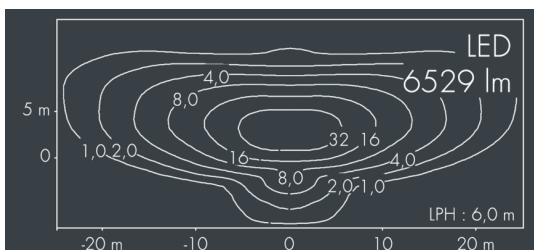

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles  $\varnothing$  60/76 mm, fastening with 4 set screws M8, cable gland: M20, with 8 m cable Ho7RN-F5G1, connecting terminal: 5 pole, PMMA lenses, integral driver (DALI), CRI > 80, 3, service life L80/B20 > 50.000 h, Beam angle (FWHM): 36° / 155°, luminous flux: 6529 lm, wattage: 52 W, delivered lumens 126 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions:  $\varnothing$  376 mm, width 112 mm, weight 5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

## Specification

Wattage	52 W	Beam angle (FWHM)	36° / 155°
Delivered lumens	126 lm/W	Housing colour	silver grey
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	3	Impact resistance	IK08
Lifetime at 25° C	L80/B20 > 50.000 h	Dimensions	$\varnothing$ 376 mm, width 112 mm
Control gear	DALI	Weight	5,00 kg