
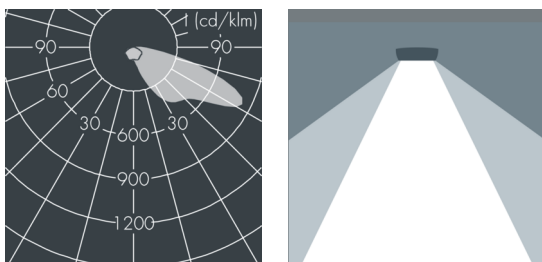


## Metaspaces

8 215 366 389  
 6 x 6,3 W, 3661 lm, 3000 K warm white, Zhaga 18 - up,  
 asymmetrical wide beam 64° / 133°

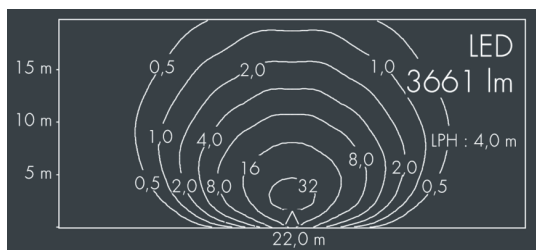

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of corrosion-resistant die-cast aluminum  $\text{AlSi12}$ , polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 5 stainless steel screws, with pole top fitter for 1 luminaire for poles  $\text{\textcircled{O}} 60/76 \text{ mm}$ , fastening with 4 set screws M8, cable gland: M20, with 8 m cable Ho7RN-F3G1, connecting terminal: 3 pole, highly efficient metallized PC reflector, integral driver (AC/DC), CRI > 80, 3, service life  $\text{L80/B20} > 50.000 \text{ h}$ , Beam angle (FWHM):  $64^\circ / 133^\circ$ , luminous flux: 3661 lm, wattage: 38 W, delivered lumens 97 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,056 m<sup>2</sup>, dimensions:  $\text{\textcircled{O}} 396 \text{ mm}$ , width 112 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

Wattage	38 W	Beam angle (FWHM)	$64^\circ / 133^\circ$
Delivered lumens	97 lm/W	Housing colour	white RAL 9002
Light source	LED 3000 K	Protection type	IP65
Color Rendering Index	CRI > 80	Protection class	I
Colour tolerance	3	Impact resistance	IK08
Lifetime $t_{a 25^\circ \text{ C}}$	$\text{L80/B20} > 50.000 \text{ h}$	Windage area	0,056 m <sup>2</sup>
Control gear	Zhaga 18 - oben	Dimensions	$\text{\textcircled{O}} 396 \text{ mm}$ , width 112 mm
Input voltage AC	220 – 240 V	Weight	5,10 kg
Input voltage DC	220 – 240 V	Max. ambient temperature $t_a$	40°
Voltage protection	6 kV L/N   10 kV L/PE		
Luminaires per B16A / C16A	20 / 33		