



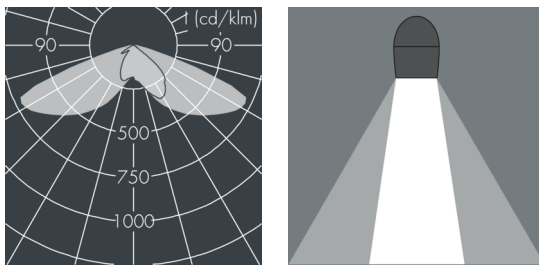

Metaspot 2

8 242 066 389

35 W, 3451 lm, 3000 K warm white, Zhaga 18,
Street Optic 51° / 141°

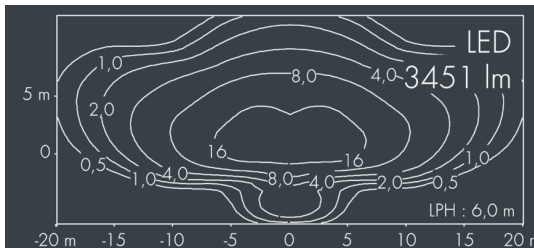

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, tool-free twist closure, mounting bracket: 2 drilled holes \varnothing 9 mm, spacing 40 mm, 1 centre hole \varnothing 14 mm, tilt range: 180°, cable gland: M20, connecting terminal: 3 pole, PMMA lens, integral driver (AC/DC), CRI > 80, 3, service life L90/B10 > 50.000 h, Beam angle (FWHM): 51° / 141°, luminous flux: 3451 lm, wattage: 35 W, delivered lumens 100 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,049 m², dimensions: \varnothing 176 mm, width 244 mm, weight 3.7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP65 IK08

Specification

| | | | |
|-----------------------|--------------------|-------------------|------------------------------------|
| Wattage | 35 W | Beam angle (FWHM) | 51° / 141° |
| Delivered lumens | 100 lm/W | Housing colour | white RAL 9002 |
| Light source | LED 3000 K | Protection type | IP65 |
| Color Rendering Index | CRI > 80 | Protection class | I |
| Colour tolerance | 3 | Impact resistance | IK08 |
| Lifetime to 25° C | L90/B10 > 50.000 h | Windage area | 0,049m ² |
| Control gear | Zhaga 18 | Dimensions | \varnothing 176 mm, width 244 mm |
| | | Weight | 3,70 kg |