





Monospot 4

8 904 262 119

45 W, 2748 lm, 2700 K – 6500 K tunable white DALI, narrow beam 10°

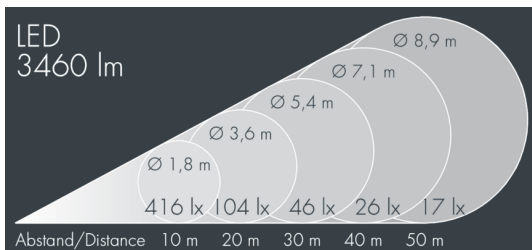

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, Colour: white RAL 9002, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 5 pole, highly efficient faceted rotationally symmetrical reflector, integral, dimmable driver (DALI), CRI > 80 / >70, 3 SCDM, service life L90/B10 > 50.000 h, Beam angle (FWHM): 10°, luminous flux: 2748 lm, wattage: 45 W, delivered lumens 61 – 75 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,075 m², dimensions: Ø 215 mm, width 240 mm, weight 5.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP67 IK08

Specification

| | | | |
|-----------------------|---------------------|-----------------------------|------------------------|
| Wattage | 45 W | Beam angle (FWHM) | 10° |
| Delivered lumens | 61 – 75 lm/W | Housing colour | white RAL 9002 |
| Light source | LED 2700 K – 6500 K | Power supply cable | Ø 6 – 13 mm |
| Color Rendering Index | CRI > 80 / >70 | Protection type | IP67 |
| Colour tolerance | 3 SCDM | Protection class | I |
| Lifetime ta 25° C | L90/B10 > 50.000 h | Impact resistance | IK08 |
| Control gear | DALI | Windage area | 0,075m ² |
| | | Dimensions | Ø 215 mm, width 240 mm |
| | | Weight | 5,10 kg |
| | | Max. ambient temperature ta | 35° |