



Nanodot

8 400 016 099

1.5 W, 151 lm, 3000 K warm white,
asymmetrical beam 43°

Remote control gear unit essentially required, see
data sheet with accessories

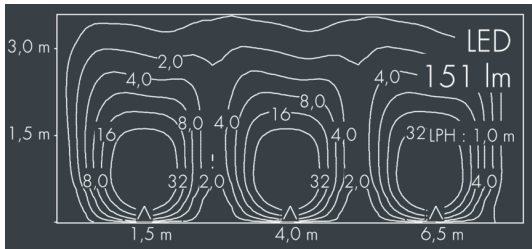

Specification text

luminaire made of corrosion-resistant stainless steel (V4A), Colour: stainless steel (V4A), all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, installation housing made of fibreglass reinforced plastic, cable gland:

2 x 130 mm FEP single wires and 2 x IP67 silicone-potted pressure clamp connectors, for flush mounting into round handrails, suitable for outer diameter 38 - 45 mm, precise light control with miniature polycarbonate optic, 80, max 2 SDCM, service life L90/B10 > 50.000 h, luminous flux: 151 lm, wattage: 1.5 W, delivered lumens 108 lm/W, protection type IP65, protection class III, impact resistance IK10, dimensions: Ø 20 mm, width 34 mm, weight 0.02 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

III IP65 IK10

Specification

| | | | |
|-----------------------|--------------------|-----------------------------|-----------------------|
| Wattage | 1.5 W | Housing colour | stainless steel (V4A) |
| Delivered lumens | 108 lm/W | Protection type | IP65 |
| Light source | LED 3000 K | Protection class | III |
| Color Rendering Index | 80 | Impact resistance | IK10 |
| Colour tolerance | max 2 SDCM | Dimensions | Ø 20 mm, width 34 mm |
| Lifetime ta 25° C | L90/B10 > 50.000 h | Weight | 0,02 kg |
| Control gear | on / off / DALI | Max. ambient temperature ta | 40° |
| Input voltage DC | 2,8 V | | |