





## Nightspot B Gobo Projector

8 987 044 549

55 W, 1 680 lm, 6 500 K cold white,  
85 mm focal length 22°

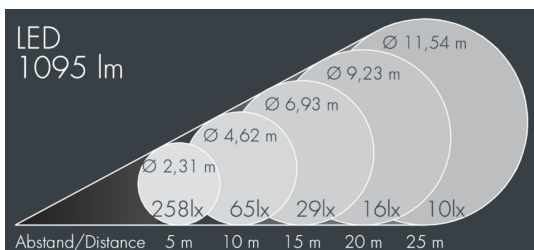

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing made of extruded aluminum and corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, closure with 4 stainless steel screws, powder coated aluminum mounting bracket with tilt scale: 2 drilled holes Ø 9 mm, spacing 70 mm, 1 centre hole Ø 22 mm, tilt range: 105°, cable gland: M20, connecting terminal: 3 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), CRI > 70, service life L70/B > 50.000 h, Beam angle (FWHM): 22°, luminous flux: 1 680 lm, wattage: 55 W, delivered lumens 31 lm/W, protection type IP67, protection class II, impact resistance IK08, windage area 0,085 m<sup>2</sup>, dimensions: Ø 240 mm, width 425 mm, weight 8.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

IP67 IK08

## Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 55 W                 | Beam angle (FWHM)           | 22°                    |
| Delivered lumens           | 31 lm/W              | Housing colour              | black RAL 7021         |
| Light source               | LED 6500 K           | Power supply cable          | Ø 8 – 1.5 mm           |
| Color Rendering Index      | CRI > 70             | Protection type             | IP67                   |
| Lifetime ta 25° C          | L70/B > 50.000 h     | Protection class            | II                     |
| Control gear               | on / off             | Impact resistance           | IK08                   |
| Input voltage AC           | 220 – 240 V          | Windage area                | 0,085m <sup>2</sup>    |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Dimensions                  | Ø 240 mm, width 425 mm |
| Luminaires per B16A / C16A | 23 / 39              | Weight                      | 8,10 kg                |
|                            |                      | Max. ambient temperature ta | 35°                    |