




Minispot 1 - 48 V

8 924 065 159

2 W, 149 lm, 4000 K neutral white, DALI, wide beam 44°

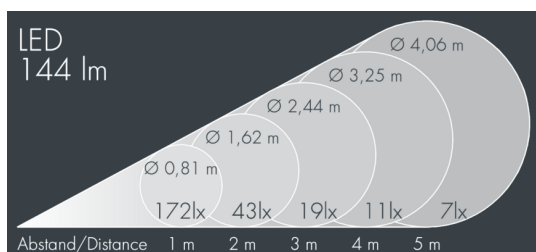

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered high efficiency safety glass, anti-reflective coating from 1 side, silicon gasket, with 2 stainless steel screws, mounting bracket: 1 long hole Ø 7 mm, spacing 12 mm, 1 center hole Ø 8.5 mm, tilt range: 185°, cable gland: M16, connecting terminal: 5 pole, highly efficient optics made of transparent thermoplastic for precise lighting tasks, Constant current control (48 V DC), CRI > 80, 3, service life L90/B10 > 50.000 h, Beam angle (FWHM): 44°, luminous flux: 149 lm, wattage: 2 W, delivered lumens 74 lm/W, protection type IP65, protection class III, impact resistance IK08, windage area 0,006 m², dimensions: Ø 58 mm, width 92 mm, weight 0.5 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

III IP65 IK08

Specification

| | | | |
|-----------------------|--------------------|-----------------------------|----------------------|
| Wattage | 2 W | Beam angle (FWHM) | 44° |
| Delivered lumens | 74 lm/W | Housing colour | white RAL 9002 |
| Light source | LED 4000 K | Power supply cable | Ø 5 – 9 mm |
| Color Rendering Index | CRI > 80 | Protection type | IP65 |
| Colour tolerance | 3 | Protection class | III |
| Lifetime ta 25° C | L90/B10 > 50.000 h | Impact resistance | IK08 |
| Control gear | DALI | Windage area | 0,006m ² |
| Input voltage DC | 24 – 48 V | Dimensions | Ø 58 mm, width 92 mm |
| | | Weight | 0,50 kg |
| | | Max. ambient temperature ta | 40° |