



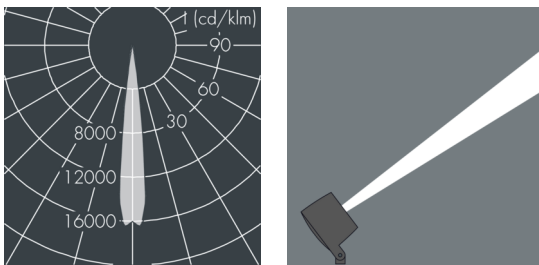

### MonoFlood 3

8 203 259 019

52 W, 2001 lm, RGBW (3000 K) warm white, DMX, narrow beam 13°

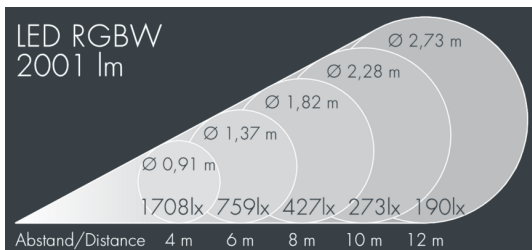

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

### Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, for installation on poles  $\varnothing$  60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes  $\varnothing$  9 mm, spacing 95 mm, 1 centre hole  $\varnothing$  13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 6 pole, precise PMMA optics, integral driver (AC/DC), service life L80/B20 > 50.000 h, Beam angle (FWHM): 13°, luminous flux: 2001 lm, wattage: 52 W, delivered lumens 38 lm/W, protection type IP67, protection class I, impact resistance IK10, windage area 0,034 m<sup>2</sup>, dimensions (L×H×W): 200 × 156 × 200 mm, weight 4.8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



### Specification

Wattage	52 W	Beam angle (FWHM)	13°
Delivered lumens	38 lm/W	Housing colour	silver grey
Light source	LED RGBW (3000 K)	Protection type	IP67
Lifetime ta 25° C	L80/B20 > 50.000 h	Protection class	I
Control gear	DMX	Impact resistance	IK10
Input voltage AC	134 – 230 V	Windage area	0,034m <sup>2</sup>
Input voltage DC	134 – 230 V	Dimensions	200 × 156 × 200 mm
Voltage protection	1 kV L/N   2 kV L/PE	Weight	4,80 kg
Luminaires per B16A / C16A	22 / 22	Max. ambient temperature ta	35°