






## Monospot Gobo

8 905 256 069

55 W, 1483 lm, 3000 K warm white,  
45 mm focal length 41°

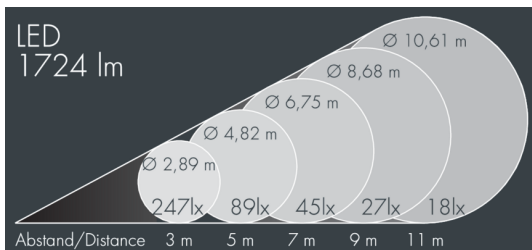

## Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: silver grey, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 3 stainless steel screws, for installation on poles Ø 60 - 100 mm, tiltable base made of powder coated aluminum, 2 drilled holes Ø 9 mm, spacing 95 mm, 1 centre hole Ø 13.5 mm, tilt range: 90°, 360° adjustable, cable gland: M20, connecting terminal: 3 pole, focusable projection lens for precise light control and sharp-edged image projections, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 41°, luminous flux: 1483 lm, wattage: 55 W, delivered lumens 27 lm/W, protection type IP65, protection class I, impact resistance IK08, windage area 0,076 m<sup>2</sup>, dimensions: Ø 215 mm, width 390 mm, weight 8 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

## Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 55 W                 | Beam angle (FWHM)           | 41°                    |
| Delivered lumens           | 27 lm/W              | Housing colour              | silver grey            |
| Light source               | LED 3000 K           | Power supply cable          | Ø 6 – 13 mm            |
| Color Rendering Index      | CRI > 80             | Protection type             | IP65                   |
| Control gear               | on / off             | Protection class            | I                      |
| Input voltage AC           | 220 – 240 V          | Impact resistance           | IK08                   |
| Voltage protection         | 2 kV L/N   4 kV L/PE | Windage area                | 0,076m <sup>2</sup>    |
| Luminaires per B16A / C16A | 23 / 39              | Dimensions                  | Ø 215 mm, width 390 mm |
|                            |                      | Weight                      | 8,00 kg                |
|                            |                      | Max. ambient temperature ta | 35°                    |