
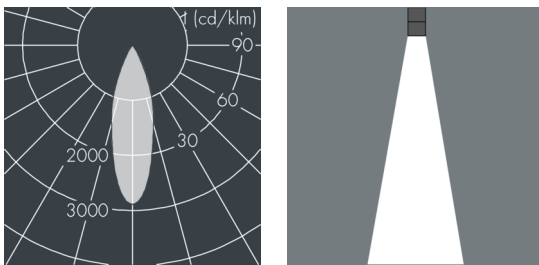


Surface-mounted downlight

8 321 046 059

25 W, 1908 lm, 3000 K warm white,
medium wide beam 31°

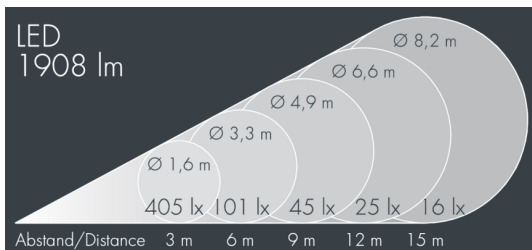

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of corrosion-resistant die-cast aluminum AlSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, silicon gasket, with grub screw, ceiling mount: 3 drilled holes Ø 5 mm on circular pitch Ø 84 mm, cable gland: Ø 7-10 mm, recessed or surface mounted cable, connecting terminal: 3 pole, rotationally symmetrical aluminum reflector, highly efficient optics made of transparent thermoplastic for precise lighting tasks, integral driver (AC/DC), CRI > 80, Beam angle (FWHM): 31°, luminous flux: 1908 lm, wattage: 25 W, delivered lumens 75 lm/W, protection type IP65, protection class I, impact resistance IK08, dimensions: Ø 150 mm, width 180 mm, weight 2.1 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.

 IP65 IK08

Specification

| | | | |
|-----------------------|------------|-------------------|------------------------|
| Wattage | 25 W | Beam angle (FWHM) | 31° |
| Delivered lumens | 75 lm/W | Housing colour | black RAL 7021 |
| Light source | LED 3000 K | Protection type | IP65 |
| Color Rendering Index | CRI > 80 | Protection class | I |
| Control gear | on / off | Impact resistance | IK08 |
| | | Dimensions | Ø 150 mm, width 180 mm |
| | | Weight | 2,10 kg |